



DAMA LED

# DAMA LED

- original design
- low operating costs
- minimalist form
- high quality
- resistant to corrosion and harmful external factors

## Application

1. Office building surroundings
2. Urban infrastructure  
(train stations, subway, stations etc.)
3. Squares and green areas
4. Pedestrian ways
5. Shopping avenues



# Features

## **Overvoltage protection**

Increases luminaire resistance against electrical discharges up to 15 pulses with voltage 10kV

## **Anodised aluminum case**

Available in 10 colours with possibility of silk finish

## **Driver**

DC high performance Power Supply supplied 1-10V interface (OPTIONAL)

## **Optical system**

Colour temperature 5000K or 3500K. Diffuser made of PMMA in two versions:

frosted




transparent





# DAMA LED

Gentle shape makes DAMA LED stand out from other products as a decorative element of urban squares and park avenues. LED module on the upper part of column causes the light to spread evenly creating a pleasant effect.




## Environmentally friendly production and usage

Systems of reducing the consumption and cleaning guarantee the ecological model for manufacturing process of DAMA LED.

Aluminium housing 100 % recyclable. LEDs used do not emit Infrared radiation. They consume less energy compared to traditional light sources resulting in reduction of CO<sub>2</sub> emission.

## Light distribution

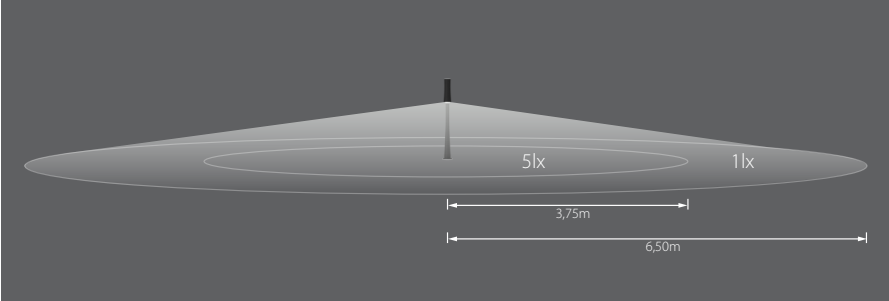

1 Strefowa Street, PL43109 Tychy, Poland

**Sales Department**

tel. +48 32 738 89 11 - 17

fax +48 32 329 13 29

[www.rosa.pl](http://www.rosa.pl)

