


# Aluminium column SAL DL-10

diameter 120 mm at the base plate

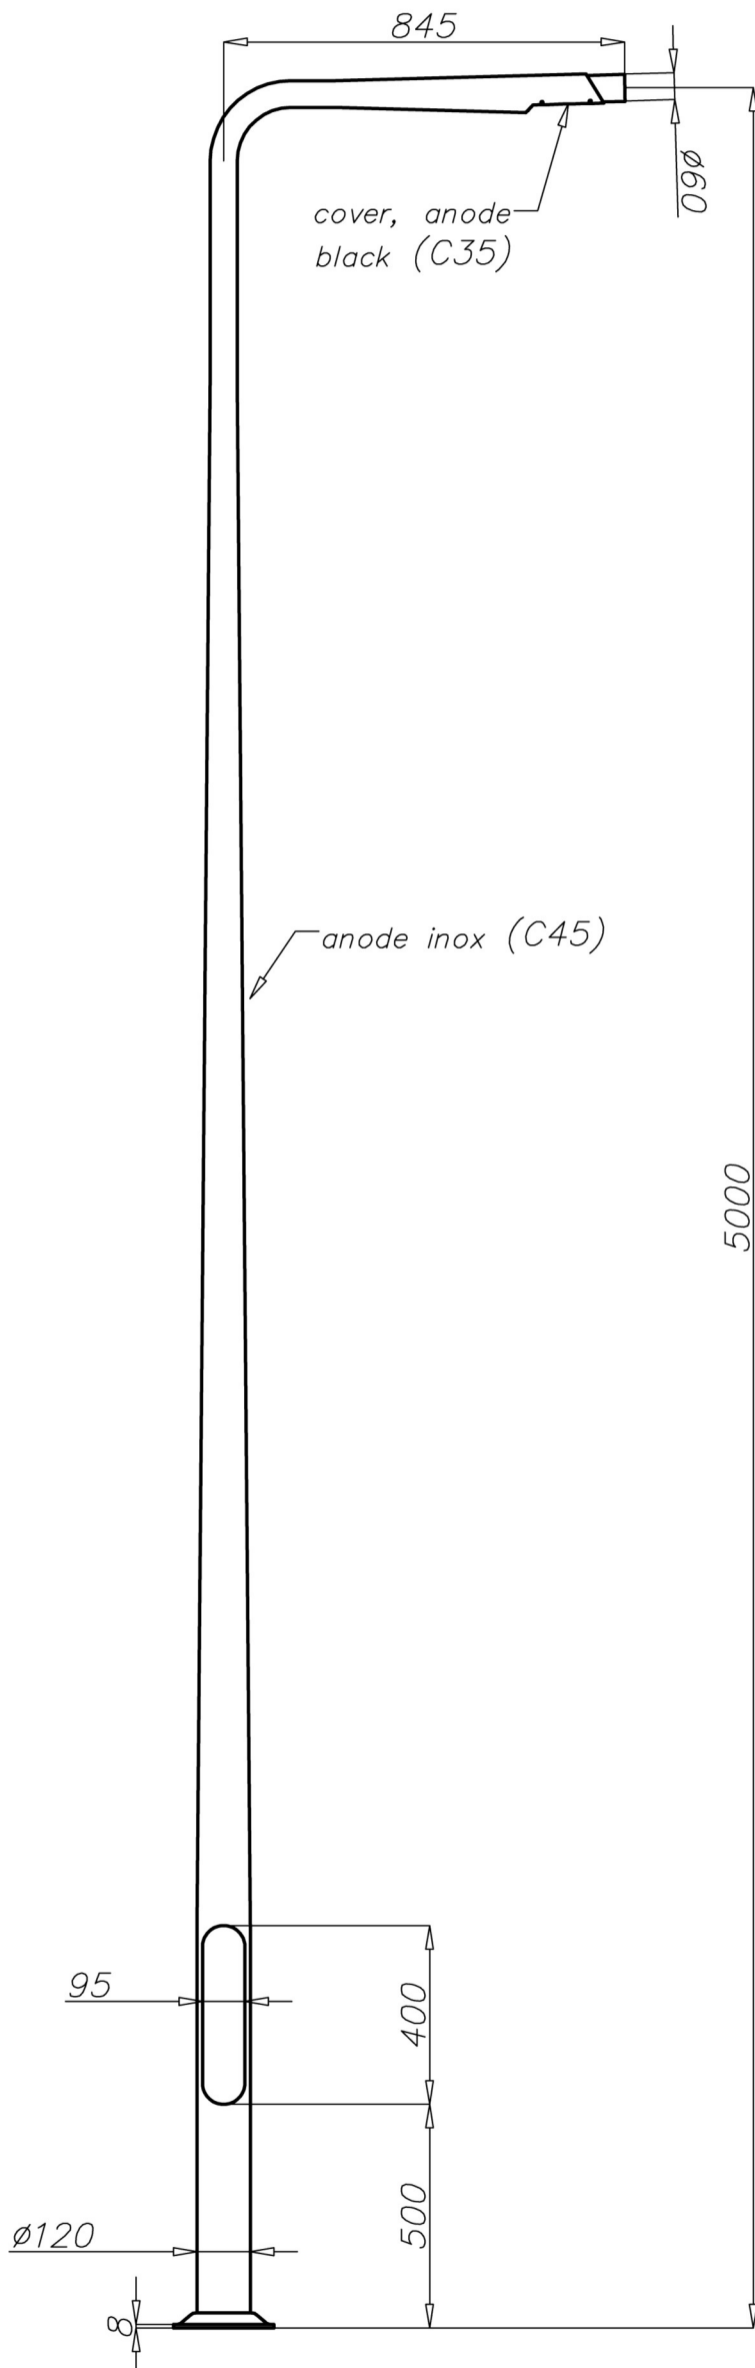

## Technical data

Aluminium Column	SAL-DL10
Product code	42999/C45/C35
Column height H [m]	5
Wall thickness [mm]	4
Net weight [kg]	23
Volume [m <sup>3</sup> ]	0,3
Post top column	luminaire ISKRA LED, ISKRA LED P
Concrete footing / reinforcement basket	B-50 / Z-50
Concrete footing code / reinforcement basket code	311150 / 311205
Hot galvanized nut set / Hot galvanized ripable nut set	4006 / 4007

## Resistance calculations

SAL DL-10 code 42999/C45/C35	Dedicated luminaire			
	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Acceptable mass of luminaires [kg]	I zone, II location category	I and III zone, II location category to 450m AMSL	II zone, II location category	III zone, II location category to 755m AMSL
ISKRA LED	✓	✓	✓	✓
ISKRA LED P	✓	✓	✓	✓

- surface: polished aluminium
- option of anodising in 10 colours, each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material
- passive safety certificate 100NE2

