


# Aluminium column SAL DP-58 dz

diameter 125 mm the the ground

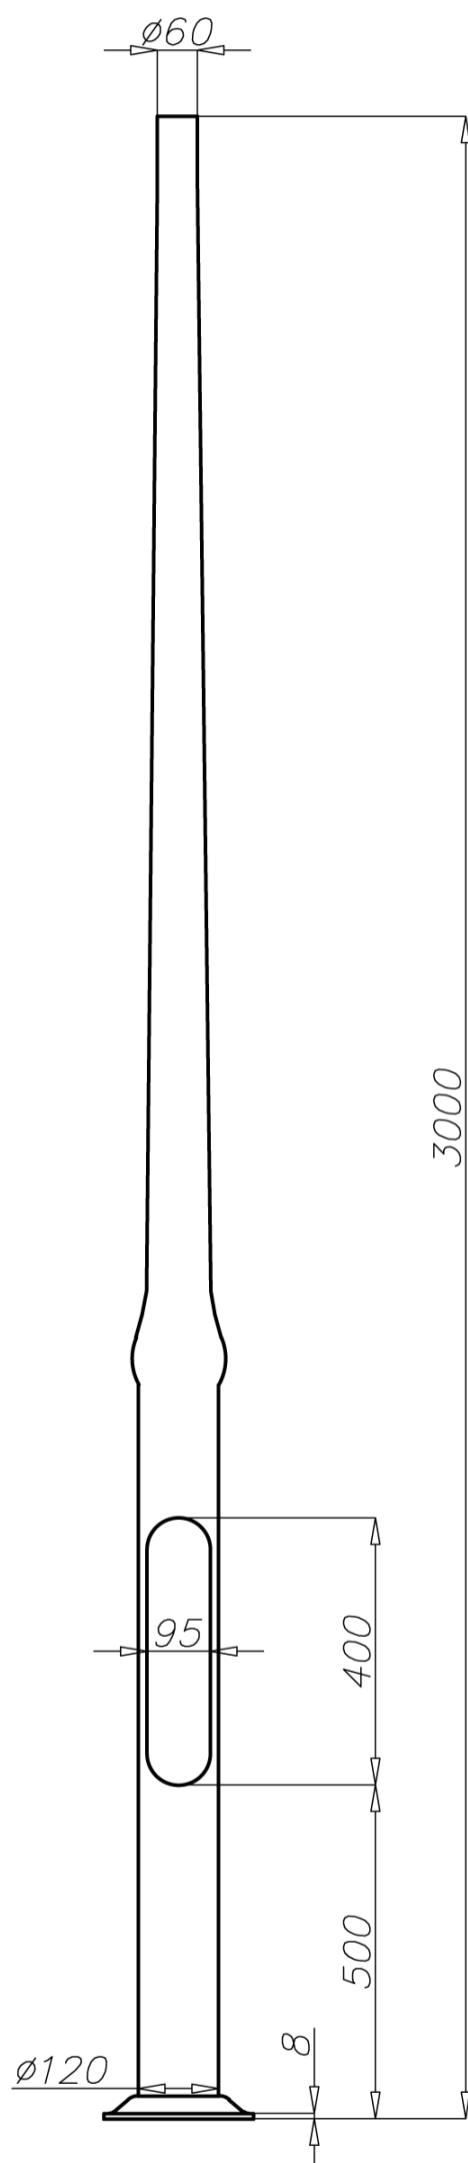

## Technical data

Aluminium Column	SAL DP-58 dz
Product code	42967
Column height H [m]	5
Wall thickness [mm]	3
Net weight [kg]	14,7
Volume [m <sup>3</sup> ]	0,041
Post top column	luminaires with Ø60 spigot entry with weight and windage not exceeding data in resistance calculations
Concrete footing / reinforcement basket	0,8

## Resistance calculations

SAL DP-58 dz code 42967	acceptable windage of luminaires [m <sup>2</sup> ] for Cx=1,0			
	Vref. = 22 m-s	Vref. = 24 m-s	Vref. = 26 m-s	Vref. = 28 m-s
Dopuszczalna waga pojedynczej oprawy [kg]	I zone, II location category	I and III zone, II location category to 450m AMSL	II zone, II location category	III zone, II location category to 755m AMSL
20	0,34	0,28	0,2	0,17

- surface: polished aluminium
- anodising in 10 colours, each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material
- passive safety certificate 100NE2